
S4-3.2 R

NEW NEW NEW NEW
S4-3.2 R II
3 colour striping with 3.2 feeders/inch
6 colour striping with 1.6 feeders/inch
NEW NEW NEW NEW

Fashionable stripes and high performance for basic fabrics with a single machine.



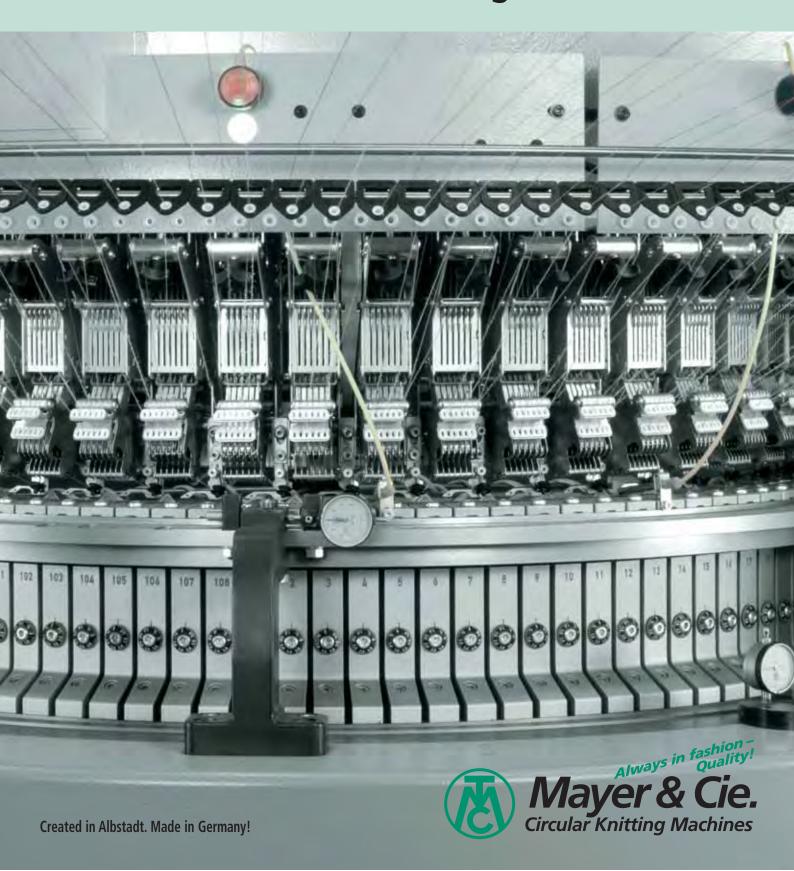

54-3.2 R II

The S4-3.2 R II knits fashionable striped fabrics with 4 and 6 colours across 1.6 feeders/inch. It is also equipped with the well proven MCT striper technology. The clever mechanical operation sequence is absolutely reliable, with minimum maintenance requirements. Ideal conditions for modern striped fabrics in top quality and high productivity.

Flexibility plus productivity.

What is new here, is a previously unheard flexibility: the striper non-knit feeders can simply be replaced with knitting feeders, immediately giving you 3.2 feeders/inch for basic single jersey fabrics. A machine for fashionable striped fabrics and for high performance single jersey output without stripes, in 2 or 4 needle structures and plated single jersey! Up to 4 needle types for each of 3 needle positions give you even greater room for manoeuvre.

High-speed gauge change.

The fast gauge change which marks all S4 machines offers greater flexibility.

Particularly efficient: the striper units do not need to be removed any more.

Cylinder- diameter	26", 30", 34"	
Machine gauges	E 18 – E 32, E 36*	
Number of feeders	1.6 / 3,2/inch (48 / 96 feeders at 30")	
Speed up to	0,9 / 1,4 m/sec. (22 / 35 rpm at 30")	
Minimum space requirement appr.	19 m² – 25 m²	
Weight appr.	1900 kg – 2500 kg	



Specifications and facts:

STANDARD		OPTION	
	Creel		Creel ■ VARI-striper creel with aluminum tubes without reserve ■ VARI-striper creel with alu-tubes with reserve ■ VARI-creel
\$ 5	Yarn feeding ● 1 ring, 1 double drive, 2 tapes ● yarn stop motion with cymbal brake and electrical knot catcher ● intermediate stop motion		 Yarn feeding 4 colour striper 6 colour striper striper feeding device (3 or 6 colours) strip. feed.dev. w. pos. feed. wheel (6 col.) strip. feed dev. w. pos. feed. wheel (3 col.) CONI+ 02 elastomeric plating yarn supply with yarn tension stop motion on top (working without tube) 2 rings, 2 double drives, 4 tapes, prepared for 3 colours striping feeding device
-1	Needles/Sinkers ■ short needles for plain single jersey ■ 1 type terrace holding-down sinkers	- 14	Needles/Sinkers
_	Cam parts ■ cam segments made of perunal ■ 0,5 ZA and 0,5 ZC/feeder (ZC to cancel 0,5 feeder/inch) ■ cylinder individual segments ■ channel cam parts ■ separate sinker cam boxes	CHANGE	Cam parts conversion kit to 3.2 knit.f./inch, also in combination with striping on 1.6 f./inch* kit f. 2 tracks, single + structures kit f. 3 tracks, single + Lapiqué + 3:1 fleece kit f. 4 tracks, single + 3:1 fleece + structures cam kit extension to 3.2 knitting feeders conversion system »Quick-Change« exchange cams for structures insertion and positioning gg for cyl.cam box
	Frame ● portal frame for 480 mm fabric rolls		Frame ■ spinning detector ■ open-width frames
②	Drive/Electric ■ frequency controlled drive (AC) ■ 380- 415 V, 50/60 Hz; 5,5 KW (30"-38") ■ 1 KW peripheral units ■ central processor unit with display ■ control voltage 24 V	4	Drive/Electric ■ power transformer ■ needle detectors ■ hole detector
	 Take-down take down (deflection winder), adjustment rings only one side MCT trapezoid spreader 		 Take-down fabric work box MCT trapezoid spreader with rolls for elastomeric and sensitive yarns fabric cutting device with ceramic knife take down roller with adjustment rings on both sides folding device
© © 3 ©	Control ● 3-shift counter ● working hour counter ● fabric roll size counter ● stationary and rotating lintblower (air: min. 6 bar, 250 l/min.) ● Uniwave oiler		Control ● 4/5-shift-counter ● VG 3 ● VG 2
	Miscellaneous		Miscellaneous Interface for MDA MDA.web software for machine data acquisition gauge/magnet fixing Intus for MER and positive feeding units Argus rapport and striper-software PIC 4-software

S4-3.2 R II – high quality – attractive price!

Simple to operate, easy to maintain.

The S4-3.2 R II is designed through and through for productivity. The required needles and sinkers are standard knitting elements used the world over. The sinker cams are designed as single elements. One cam segment per feeder helps simplify the exchange of sinkers.





Choice of open width frames.

For crease-free production, especially with modern synthetic yarns, Mayer & Cie. offers special open width frames for the S4 machines. With the "Made in Germany" version, the fabric width can be adjusted individually on a scale, and previous orders can be reproduced at any time.

The Asian version without the adjustable triangle has successfully been tested in practice. Both open width frames can be converted to tubular deflection winding.



»Quick-Change« for fast, simple gauge conversion.

S4-3.2 R II is equipped with a new version of the »Quick-Change« gauge conversion.

This facilitates a gauge conversion considerably and thus leads to shorter down times. A support frame for »Quick-Change« is no longer required.



Fabric takedown as deflection winder or folding device.

The fabric takedown, featuring a deflection winder mechanism and MCT trapezoidal spreader, is designed for fabric bales of up to 480 mm in diameter. A folding device is offered as an optional extra.







Mayer & Cie. GmbH & Co. KG
Tailfingen · Emil-Mayer-Straße 10·D-72461 Albstadt
Postal address: Postfach 20 15 80·D-72438 Albstadt
Tel. +49 (0)7432 7000 · Fax +49 (0)7432 700315
E-mail: sales@ mayercie.de · www.mayercie.com